

POWERLINK LED Drivers

—— Your best match with LED sign

Specifications:

Output mode: Constant voltage output

Rated input voltage: 220VAC 50/60 Hz


Range of work voltage: 220 ~240VAC

Output Voltage: 12VDC \pm 0.5V

Storage temperature: -40~85°C

Working temperature: -20~60°C

Working humidity: 0-90% relative humidity

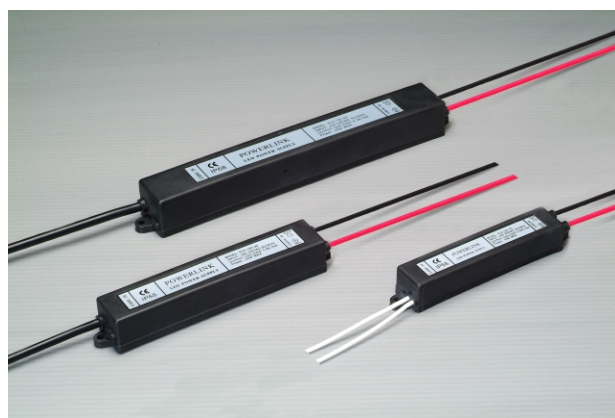

Parameter :

Model	PLS-12D-10	PLS-12D-20	PLS-12D-40
Dimension(L x W x H)	134 x 25 x 20 mm	161 x 30 x 23 mm	242 x 33 x 27.5 mm
Weight	0.12 kg	0.2 kg	0.38 kg
Maximum input current	0.10A	0.22A	0.36A
Output voltage	DC12 \pm 0.5V	DC12 \pm 0.5V	DC12 \pm 0.5V
Output current	0.83A max	1.7A max	3.33A max
Maximum output power	10W	20W	40W
Open-circuit protection	YES	YES	YES
Thermal protection	N/A	YES	YES